


COMING



## V2 ELECTRIC

Full automatic installation! Robust and compact electric operated fiber blowing machine. This machine can be configured from 2,4 to 16 mm cable and 7 to 50 mm duct. Anodized aluminum construction makes this machine both lightweight and easy to maintain .

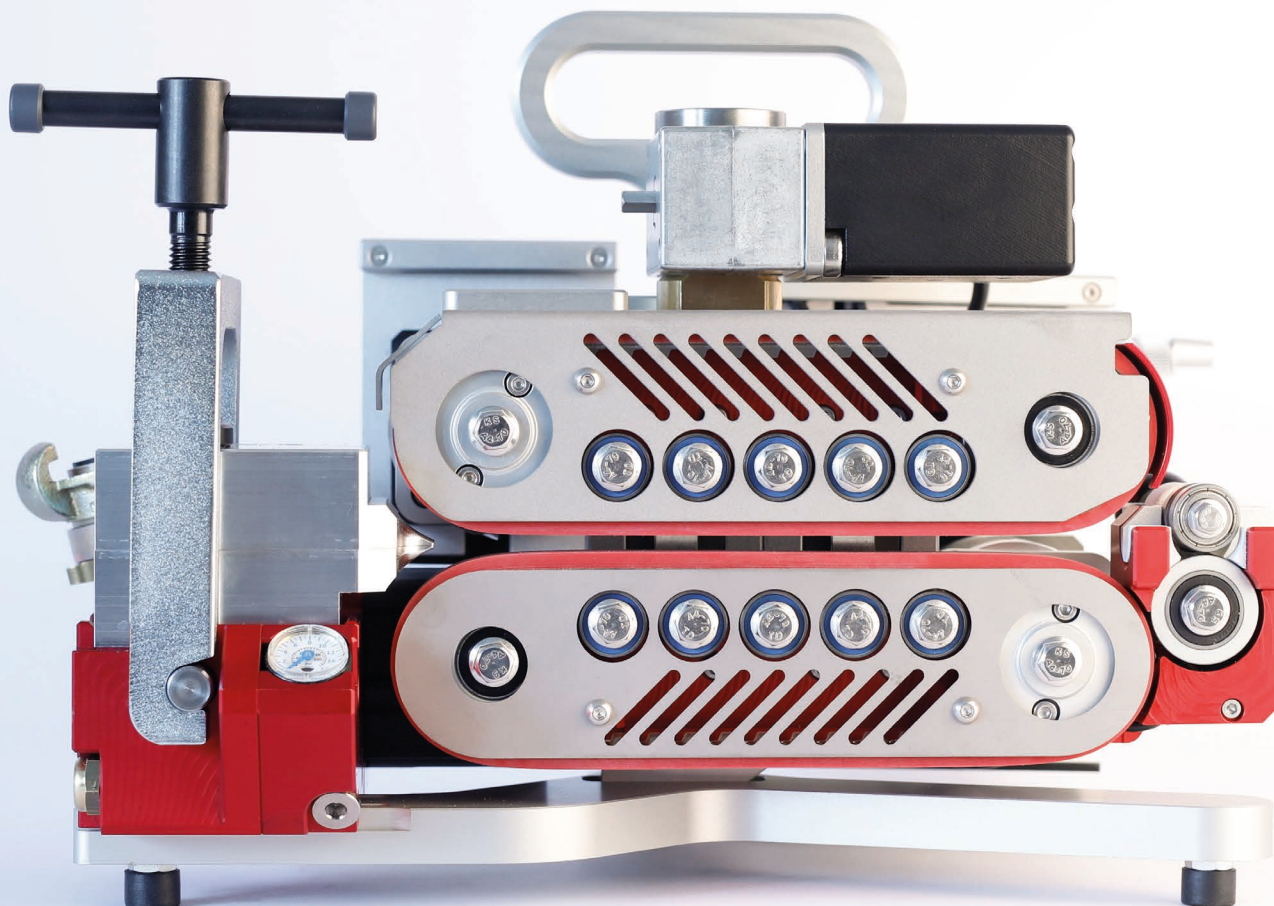

**Power:**  
110 and 230 V / 1500 W



**Battery:**  
56 V/10 Ah



**Max pressure:**  
16 Bar



**Pushing force:**  
up to 600 N



**Cable diameter:**  
2,4-16 mm



**Duct diameter:**  
7-50 mm



**Weight:**  
approx 14 kg



**Air connection:**  
3/4" Claw connector



**WxHxD**  
330 x 250 x 330 mm

# ELECTRIC FIBER BLOWING MACHINE FOR CABLE 2.4-16 MM / DUCT 7-50 MM


- Electrically operated. 230V power supply. Optional 56V Battery.
- Electronic stopping/slipping protection within 50 ms.
- Softstart: Enables an even smoother start protecting the fiber.
- Auto mode including control of air supply.
- Display for current speed, distance, cable force, pressure and duct air temp.
- Max. speed: 200 m/min.
- Stepless pushing force on cable up to 600 N.
- Electric adjustable clamping force.
- Electric adjustable air supply.
- Works with JetLogger.
- Memory: The last inserted data like pushing force will stay in the memory even if the device will be switched off or the battery need to be exchanged.
- Service info: Memory of total milage/distance since machine taken into operation.
- Duct air release button.
- Diagnostic system.
- Floating prepared. No additional Hardware.

## STD CONFIGURATION V2 E


- Transport case
- Extra fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- Service kit
- Drive belts (Red)

## ACCESSORIES FOR V2 E

- Afterblower
- Jetlogger
- Duct clamps
- Cabel guides



DUCT CLAMP (AVAILABLE IN 3 DIFFERENT SIZES)



AFTERBLOWER



CABLE GUIDE (AVAILABLE IN 3 DIFFERENT SIZES)



JETTING V2 ELECTRIC